




...continued.

10. Fit the wall profile cover strips onto the inside of the profiles using a rubber mallet if necessary then fit the top cover caps supplied and the self adhesive 'AQATA' cover badge for the bottom horizontal rail.

11. To position the sliding glass door stand inside the enclosure and lift the door up locating the top two rollers into the top track and engaging the bottom rollers in the bottom track. The rollers have an adjustable cam which is set by unscrewing the slot head screw and turning the cam using the slot in the moulding. Raise or lower the adjustable rollers to allow parallel closing against the magnet seal on the edge of the glass and the wall profile. Adjust the bottom roller cams to fully engage the bottom rail. Check the door glides smoothly with no drag but ensure the roller wheels cannot become disengaged.

12. Apply a continuous small bead of silicone caulking to the outside edges of the enclosure. Also seal the inside vertical wall profile edge and the bottom edge of the glass of the side panel. Ensure a good seal is made and there are no pin holes in the sealant. DO NOT seal the inside horizontal edges of the wall mounting rails to ensure that any water (condensate) drains back into the tray/wet area.

DO NOT USE THE SHOWER ENCLOSURE FOR 24 HOURS TO ENSURE SILICONE IS FULLY CURED AND WATERPROOF.

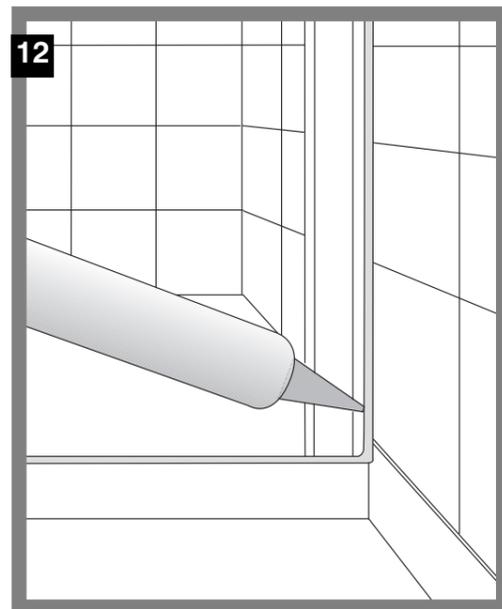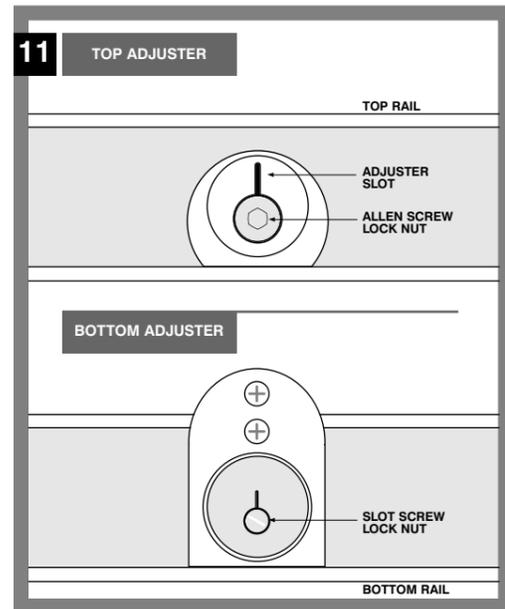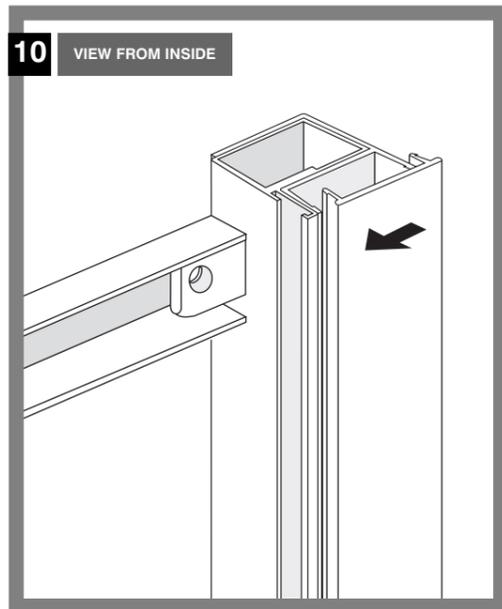

AQ 23/1/1/1 - SP305



Installation Instructions Spectra 305 Sliding Door - Corner Option

Issue 3 - December 2011

We recommend the shower tray is fitted correctly and sealed prior to tiling.
Tile down onto the tray and re-seal before installing the shower enclosure.

Spectra 305 Sliding Door Corner Option

TWO MAN INSTALLATION

IMPORTANT - Please read the following instructions and fully understand the process before attempting to fit the enclosure. The Spectra range incorporates a unique waterproof bonding system which utilizes self adhesive acrylic tape to create a permanent watertight bond between two pieces of glass. The tape is bonded to one piece of glass at our factory. DO NOT remove the red protective covering from the bonding tape until the corner brackets are set in the correct position.

Ensure that shower enclosure area is tiled prior to installation.

Equipment Required

Power drill, 6mm masonry drill bit, tape measure, ruler, pencil, masking tape, sanitary grade silicone sealant, rubber mallet, posidrive screwdriver / bits, spirit level and the fitting kit supplied which includes wall plugs, screws, plastic tube and allen keys.

The components for the Spectra Corner Enclosure are packed in 3 boxes comprising:-

Box 1 a) Main frame with adjustable wall mounting profiles and fixed glass screen, b) Handles, c) Installation Instructions and d) Squeegee.

Box 2 Sliding Glass Door

Box 3 Fixed panel with adjustable wall mounting profile

Please open boxes with care and notify your supplier immediately if anything is damaged. Please do not discard packaging. Repack carefully if necessary.

- For wet room applications ensure the area is professionally sealed and flat where the screen meets the floor or walls. If fitting onto a shower tray follow manufacturer's installation instructions. Ensure the tray is level using a spirit level on at least two diagonals. Check the tray has been sealed correctly and sealant is cured before attempting to install the shower enclosure. We recommend sealing the tray prior to tiling, tiling down onto tray and re-sealing. The floor area around the tray should also be sealed and waterproof.
 - The adjustable wall mounting profiles for door and side panel have concealed fixings. Remove cover strip (B) by sliding out from wall mounting profile (C) on both items.
 - Remove the captive screws (Z) from their **TRANSIT** position in wall profiles (C) do not discard these screws. Separate the wall mounting profiles from the door and the side panel. Keep the door and side screen components separate as they are not interchangeable.
 - Locate the wall mounting profiles (A) in the correct position approximately 15mm in from the outside edge of tray. Plumb true with a spirit level. Place 3 horizontal strips of masking tape onto the tiles in line with the 3 pre-drilled slots in the wall mounting profiles. Check for level and mark through holes with a pencil. Also mark tape at side of profile. Drill and plug the wall. Remove masking tape. Re-locate wall mounting profiles, re-checking for plumb. Use the plastic tube from the fitting kit to hold the stainless steel screw provided, insert a crosspoint/ posidrive screwdriver into the tube to locate the head of the screw. Locate the screw into the wall plug through the wall mounting profile (A). Tighten screws re-checking with spirit level before tightening fully.
 - Slide the door frame and side panel into their wall mounting profiles. The door frame should be angled slightly away from the tray edge to allow access when fitting the side screen. Re fit captive screws (Z) through the adjustment slot in the wall profile into the pre drilled hole in the main frame, but do not tighten fully until the enclosure is assembled.
 - Fit the two corner brackets onto the side panel as shown in fig 6. These brackets create a fitting aid when positioning and finally bonding the side screen to the front panel.
 - Leave the red protective tape in position at this stage and align the side screen and front glass panel using previously fixed corner brackets as guides. Check the glass screens are in perfect alignment then remove the side panel glass away from the tray and clean the glass edge of the fixed door panel glass with the alcohol wipe provided. Allow to flash dry. Apply a small bead of silicon sealant to the back inside face of the lower horizontal aluminium rail (see diagram). Remove the red protective tape from the side panel and fit the two glass panels together. It is recommended that this is done progressively from the bottom upwards. This is a two man operation. Clean off any excess silicone and fit the grey Aqata badge (supplied in the fixing kit) to the outside face of the side panel glass so that it covers the edge of the lower aluminium rail.
- Please Note: The bonding tape is a contact adhesive; therefore it cannot be repositioned once bonded. Take the trouble to do a practice run and prepare alignment as detailed!**
- Remove the corner brackets from their temporary position on the main panel and re-fit onto the corner as shown in the diagram. Please Note: the plate with the slot fits along the front of the main panel. Allow the two plates to engage loosely before aligning the top and bottom edges of the bracket and then fully tighten with the Allen key provided.
 - Adjust the door frame and side panel so they are set parallel to the edges of the tray and both vertical. When aligned tighten the captive screws (Z) on the wall profiles.

